Gemini Specialty Finishes

Product Data Sheet

Dimensions	6"x48" Planks
Thickness	2.0mm
Wear Layer	0.3mm
Edge	Micro Bevel
Construction	High pressure heat laminated
Application	Light commercial glue down
Coating	Gemini Specialty Finishes 4S coating for superior durability, scratch protection, stain andscuff resistance
Textures	Realistic embossing textures allow you to see all the grains and knots asevident in real wood
Grade Level	Suitable for all interior floor surfaces; above, on or below grade

LIFETIME LIMITED RESIDENTIAL WARRANTY • **20 YEARS** COMMERCIAL WARRANTY • **WATER PROOF** • **SOFT & WARM** UNDERFOOT • **RADIANT HEAT** SUITABLE • **100%** RECYCLEABLE • **INDENDATION** RESISTANT

1. Harbinger 4S Coating
2. Duratec™ high molecular phenol free wear layer
3. Decorative image
4. Dimensionally stable print film
5. Duracore™ phthalate free structural layer
6. Balanced layer

4S TECHNOLOGY
SUPERIOR DURABILITY
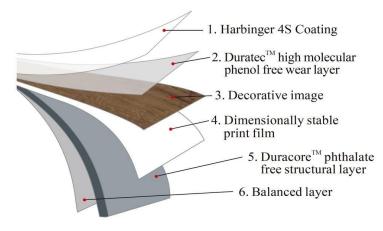SCUFF RESISTANCE
STAIN RESISTANCE
SCRATCH PROTECTION

Gemini Specialty Finishes is committed to an environmentally and socially responsible business practice. Toensure highest quality product, Gemini Specialty Finishes is made with bio-based plasticizer and virgin PVC.This guarantees a product free of heavy metal, phthalate and phenol.

VERIFIED by SCS GLOBAL SERVICES — ENVIRONMENTAL PRODUCT DECLARATION BASED ON LCA

CERTIFIED SUSTAINABILITY ASSESSMENT SCS GLOBAL SERVICES — NSF / ANSI 332 - RESILIENT FLOORING **PLATINUM**

VERIFIED by SCS GLOBAL SERVICES — HEALTH PRODUCT DECLARATION

floor score

COMMITTED TO PRODUCT TRANSPARENCY

CERTIFIED BY SCS Global Services