



As a market leader and progressive company, we recognize it is our responsibility to create and live by sustainable business practices.

Performance Criteria	Test Method	Requirement	Harbinger Result
Classification	ASTM F1700-04	ASTM F1700 Standard Specification for Solid Vinyl Floor Tile	Class III Type B Embossed Surfaces
FloorScore	Scientific Certification Systems (SCS)	FloorScore Indoor Air Quality (IAQ)	Meets IAQ of LEED, CHPS and Green Guide for Health Care
FloorScore - Phenol	(SCS)	Allowable concentration 100 (µg/m³)	Phenol free wear layer
VOC	State of California DOHS R-174	Volatile Organic Compound and Aldehyde Emissions test. Allowable: 500 mg/m³.h	44µg/m³.h Less than 10% of allowable level
Critical Radiant Flux	ASTM E648-10	Class 1, 0.45w/cm² or higher	Pass; Class 1
Smoke Density (flaming)	ASTM E662-09	Specific optical density max. 450	Pass; < 357
Smoke Density (non-flaming)	ASTM E662 -09	Specific optical density max. 450	Pass; < 339
Slip Resistance	ASTM D2047	Static coefficient of friction: OSHA min. 0.5; ADA (guideline) min. 0.6	Pass 0.90 (wet); compliance varies with surface texture
Heavy Metal Content	ASTM F963	Best = no detectable heavy metals	No detectable heavy metals <1.5mg/kg
Phthalate	CPSC-C1001-09.3	Meet CPSA Guideline	Exceeds CPSA guideline. Harbinger is phthalate free.
Static load limit	ASTM F970	Specified load 250lbs	Residual compression 0.004 inch
Flexibility	ASTM F137	No cracks/breaks	Pass; 6mm Mandrel
Color Fastness (heat)	ASTM F1514	Max. average delta E of 8	Pass
Color Fastness (light)	ASTM F1515	Max. average delta E of 8	Pass
Quality Control Management	ISO 9001 achieved	Environmental Management	ISO 14001 achieved
Heat Stability	ASTM F1514	Less than 8.0 Delta E	Pass
Residual Indentation	ASTM F1914-98	Specified load 140lbs	0.006 inch (3.5%)
Stain and Chemical Resistance	ASTM F925-2	Best = no change	No change
Dimensional Stability	ASTM F2199	< 0.10%	Pass, < 0.08%
IIC (Impact Insulation Class)	ASTM E492	Recommended IIC of 50 for commercial buildings	IIC 73* tested on 6" concrete (Varies by product)
STC (Sound Transmission Coefficient)	ASTM E90-09 ASTM E413-10	Recommended STC of 50 for commercial buildings	STC 68* tested on 6" concrete (Varies by product)
Radiant Heat Suitability	-	Suitable for under floor heating	Up to 28°C (82°F)

LEADERSHIP IN ENERGY AND ENVIRONMENTAL DESIGN LEED v4		
Building Design and Construction: New Construction LEED v4	Building product disclosure and optimization – Environmental Product Declarations (EPD) (up to 2 points)	Harbinger Environmental Product Declaration (EPD) accredited by SCS Global Services
Building Design and Construction: New Construction LEED v4	Building product disclosure and optimization – material ingredients (up to 2 points)	Harbinger Health Product Declaration (HPD) accredited by SCS Global Services
Building Design and Construction: New Construction LEED v4	Certified Multi-Attribute Products and Material (possible 1 point)	Harbinger NSF/ANSI 332 Platinum Certification The highest level of performance recognized.
Building Design and Construction: New Construction LEED v4	Low emitting materials (up to 3 points)	Harbinger Flooring is FloorScore certified Uzin KE2000S and KE 66 adhesive are VOC compliant.
Building Design and Construction: New Construction LEED v4	Verified Construction and Demolition Recycling Rates (possible 1 point)	Harbinger is fully recyclable

www.HarbingerFloors.com
HARBINGER NORTH AMERICA TOLL FREE TELEPHONE 1-866-646-6519



Harbinger is committed to an environmentally and socially responsible business practice. To ensure highest quality product, Harbinger is made with bio-based plasticizer and virgin PVC. This guarantees a product free of heavy metals, phthalates and phenols.

Publication Date: August 2024




The beauty of wood and natural stone meets the ease and durability of Harbinger™




Craftsman Series

Where style, design, performance and price come together in harmony.

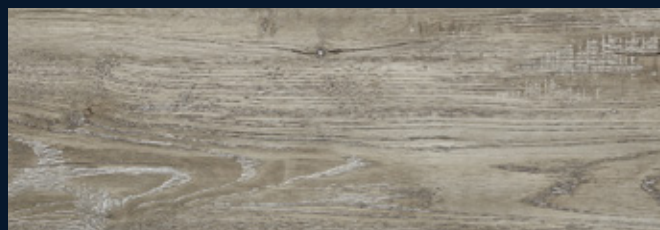


HCP 44011R Beachcomber 7.36" x 48.3" x 3.0mm, 0.55mm WL

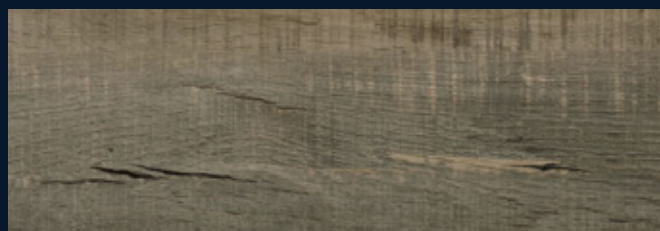

HCP 44022C Topeka 7.36" x 48.3" x 3.0mm, 0.55mm WL




HCP 44033R Horizon 7.36" x 48.3" x 3.0mm, 0.55mm WL

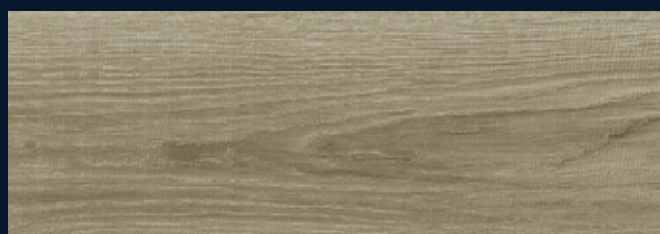


HCP 44044R Gobi 7.36" x 48.3" x 3.0mm, 0.55mm WL




HCP 66022R Jakarta 9.33" x 72.44" x 3.0mm, 0.55mm WL

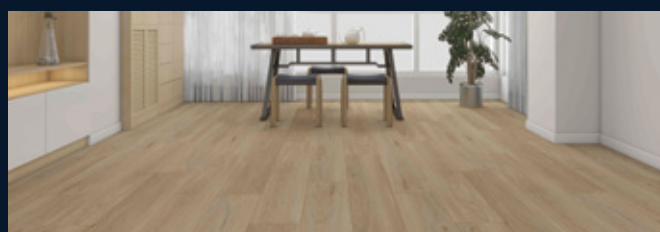

HCP 66011R Brunei 9.33" x 60.24" x 3.0mm, 0.55mm WL

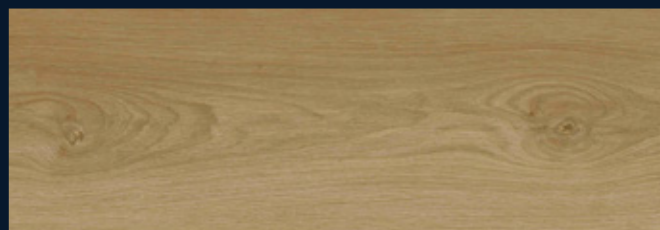


HCP 66033R Tonga 9.33" x 60.24" x 3.0mm, 0.55mm WL

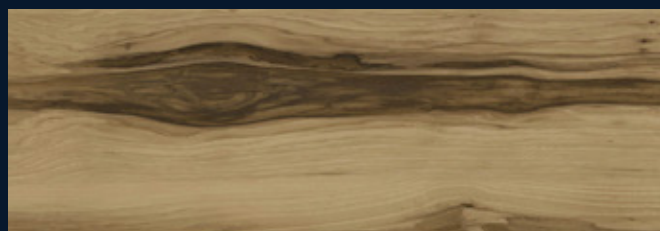

HCP 66044R Bali 9.33" x 72.44" x 3.0mm, 0.55mm WL




HCP 66055R Paris 9.33" x 60.24" x 3.0mm, 0.55mm WL

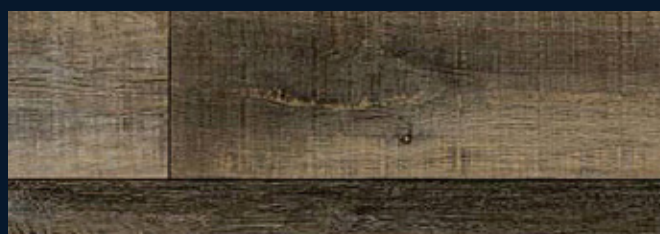


HCP 99033R Farmhouse Umber 9" x 48" x 3.0mm, 0.55mm WL




HCP 99044R Farmhouse Nordic 9" x 48" x 3.0mm, 0.55mm WL

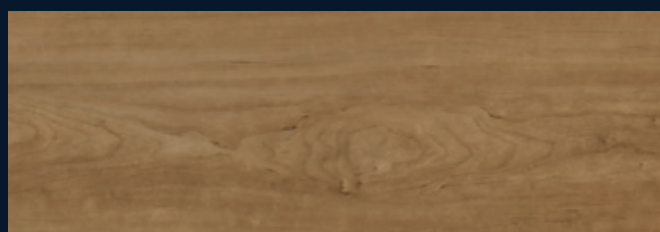

HCP 99066T Burmese Teak 9" x 48" x 3.0mm, 0.55mm WL

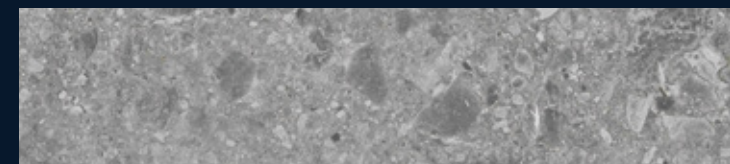

HCP 88011T Terrazzo 16" x 32" x 3.0mm, 0.55mm WL

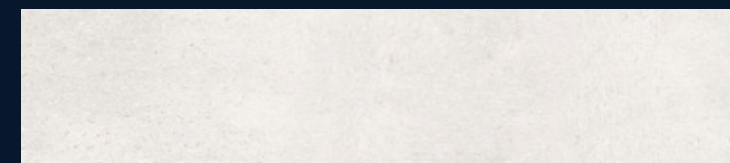


HCP 88022T Namibia 16" x 32" x 3.0mm, 0.55mm WL




HCP 88033T Zambia 16" x 32" x 3.0mm, 0.55mm WL




HCP 88044T Madagascar 16" x 32" x 3.0mm, 0.55mm WL

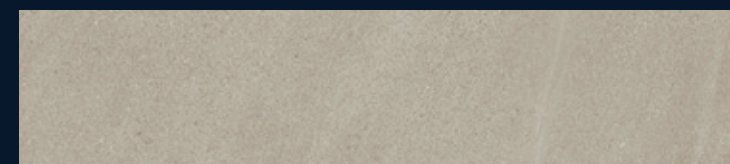

HCP 88055T Angola 16" x 32" x 3.0mm, 0.55mm WL

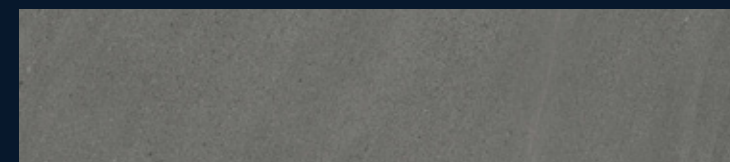

HCP 88066T Botswana 16" x 32" x 3.0mm, 0.55mm WL

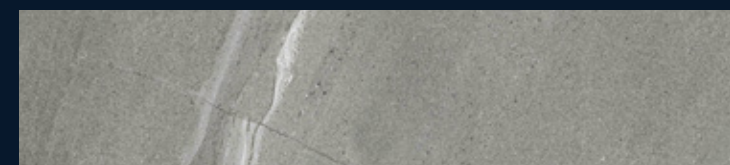

HCP 88077T Kenya 16" x 32" x 3.0mm, 0.55mm WL



HCP 88088T Tanzania 16" x 32" x 3.0mm, 0.55mm WL

Why Choose Harbinger?

Harbinger vinyl flooring is virtually indistinguishable from the natural beauty of the materials which inspire its designs – yet it minimizes the practical drawbacks of natural flooring by providing increased performance with lower maintenance.

Harbinger flooring is made from extremely durable pure vinyl with 4S technology.

4S

TECHNOLOGY
SUPERIOR DURABILITY
SCUFF RESISTANCE
STAIN RESISTANCE
SCRATCH PROTECTION



Benefits:

Heavy commercial wear layer (22mil/0.55mm) ensures superior durability, wear resistance and lower maintenance vital to commercial applications.

Provides lower lifecycle costs than most flooring products – outperforming laminates and hardwoods.

Manufactured under ISO 9001:2008 quality control and ISO 14001:2004 environmental management standards.

CONTRACT SERIES

Durability, style and low maintenance at contractor pricing.



HVP 22044T Coventry Spice 6" x 48" x 2.0mm, 0.3mm WL



HVP 22055T Savannah Oak 6" x 48" x 2.0mm, 0.3mm WL



HVP 22077T Bonsai Maple 6" x 48" x 2.0mm, 0.3mm WL



HVP 22088T Tumbleweed 6" x 48" x 2.0mm, 0.3mm WL



HVP 22099T Sienna 6" x 48" x 2.0mm, 0.3mm WL



HVP 33022T Canberra 6" x 48" x 2.0mm, 0.3mm WL



HVP 33011T Melbourne 6" x 48" x 2.0mm, 0.3mm WL



HVP 33033T Perth 6" x 48" x 2.0mm, 0.3mm WL



HVP 33044T Winton 6" x 48" x 2.0mm, 0.3mm WL



HVP 33055T Sydney 6" x 48" x 2.0mm, 0.3mm WL



HVP 33066T Marla 6" x 48" x 2.0mm, 0.3mm WL



HVP 33077T Cairns 6" x 48" x 2.0mm, 0.3mm WL



HVP 33088T Brisbane 6" x 48" x 2.0mm, 0.3mm WL

www.harbingerfloors.com

THE QUIET ZONE Your all in one acoustical flooring solution.



TQZ 1510R Nimbus 7.36" x 48.3" x 4.5mm , 0.55mm WL



TQZ 1511H Serene 7.36" x 48.3" x 4.5mm , 0.55mm WL




TQZ 2301R Copenhagen 8.11 " x 60.24 " x 4.5mm , 0.55mm WL



TQZ 2302R Sea Salt 8.11 " x 60.24 " x 4.5mm , 0.55mm WL



TQZ 2405R Munich 8.11" x 60.24" x4.5mm , 0.55mm WL

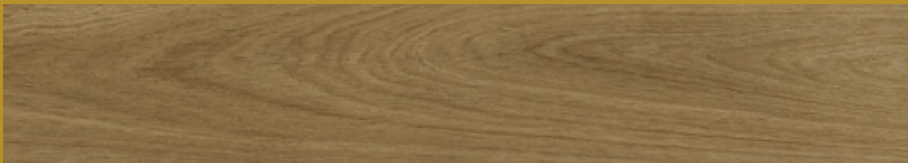

TQZ 3309R Cumulus 7.36" x48.3" x 4.5mm , 0.55mm WL



TQZ 4404R Cirrus 7.36" x48.3" x 4.5mm , 0.55mm WL



TQZ 2303T Coastal Fog 16" x 32" x 4.5mm, 0.55mm WL




TQZ 2304T Mountain Fog 16" x 32" x 4.5mm, 0.55mm WL




TQZ 2305T Night Sky 16" x 32" x 4.5mm, 0.55mm WL



TQZ 2402T Bianco 16" x 32" x 4.5mm, 0.55mm WL

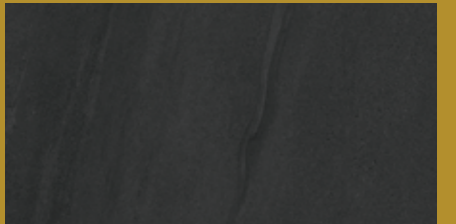


TQZ 2403T Vik 16" x 32" x 4.5mm, 0.55mm WL

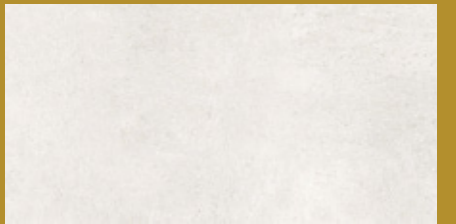

TQZ 2404T Amuse 16" x 32" x 4.5mm, 0.55mm WL

IIC 72 STC 70

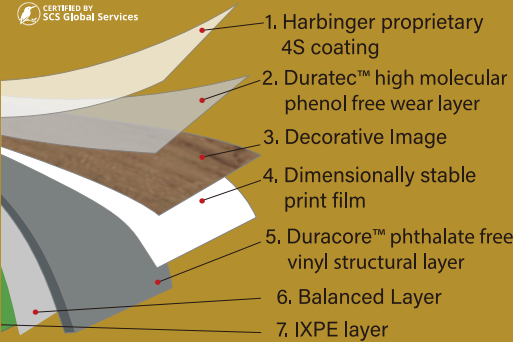

www.harbingerfloors.com

Signature Acoustic Click

A premium waterproof product, built to withstand the rigors of daily life.



SAC 55101R Dublin 9" x 59.5" x 7.5mm, 0.55mm WL



SAC 55102R Churchill 9" x 59.5" x 7.5mm, 0.55mm WL



SAC 55103R Aberdeen 9" x 59.5" x 7.5mm, 0.55mm WL



SAC 55104R Alexandria 9" x 72" x 7.5mm, 0.55mm WL



SAC 55105R San Antonio 9" x 72" x 7.5mm, 0.55mm WL



SAC 55106R Cornwall 9" x 72" x 7.5mm, 0.55mm WL



SAC 55107R Knoxville 9" x 72" x 7.5mm, 0.55mm WL



SAC 55108R Sussex 9" x 59.5" x 7.5mm, 0.55mm WL




SAC 55109R Nottingham 9" x 59.5" x 7.5mm, 0.55mm WL



SAC 55110R Cardiff 9" x 72" x 7.5mm , 0.55mm WL



SAC 55111R Canterbury 9" x 72" x 7.5mm , 0.55mm WL

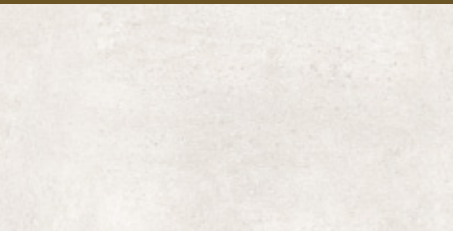

SAC 55001S Gaudi
16" x 32" x 7.5mm, 0.55mm WL



SAC 55002S St. Tropez Limestone
16" x 32" x 7.5mm, 0.55mm WL



SAC 55003S Amtico Grey
16" x 32" x 7.5mm, 0.55mm WL



SAC 55004S Marengo Grey
16" x 32" x 7.5mm, 0.55mm WL



SAC 55005S Kaya
16" x 32" x 7.5mm, 0.55mm WL

IIC 73 STC 68




www.harbingerfloors.com



SAC 55112R Colchester 9" x 72" x 7.5mm, 0.55mm WL



SAC 55113R Truro 9" x 72" x 7.5mm, 0.55mm WL

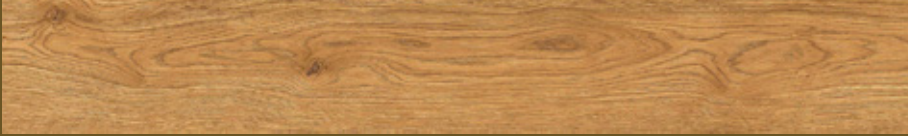

SAC 55114R Plymouth 9" x 72" x 7.5mm, 0.55mm WL



SAC 55115R Exeter 7.8" x 59.5" x 7.5mm, 0.55mm WL



SAC 55116R Birmingham 7.8" x 59.5" x 7.5mm, 0.55mm WL



SAC 55117R Poole 7.8" x 59.5" x 7.5mm, 0.55mm WL



SAC 55118R Derby 7.8" x 59.5" x 7.5mm, 0.55mm WL



SAC 55119R Chester 7.1" x 48" x 7.5mm, 0.55mm WL




SAC 55120R Durham 7.1" x 48" x 7.5mm, 0.55mm WL



SAC 55121R Sheffield 7.1" x 48" x 7.5mm , 0.55mm WL




SAC 55122R York 7.1" x 48" x 7.5mm , 0.55mm WL

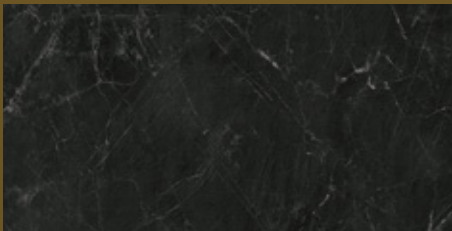

SAC 55006S Nero
16" x 32" x 7.5mm, 0.55mm WL




SAC 55007S Selene
16" x 32" x 7.5mm, 0.55mm WL

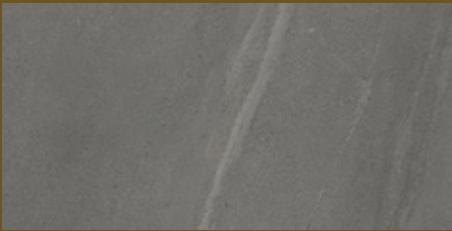


SAC 55008S Marmo
16" x 32" x 7.5mm, 0.55mm WL



SAC 55009S Basalt
16" x 32" x 7.5mm, 0.55mm WL

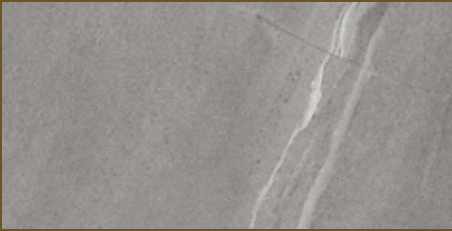

SAC 55010S Bantame
16" x 32" x 7.5mm, 0.55mm WL

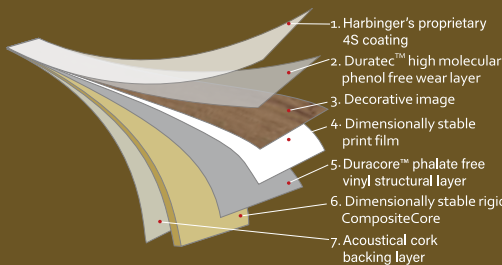

www.harbingerfloors.com